Specifications of Phaser 3435DN/ Phaser 3435D

Print Functions

	Phaser 3435DN	Phaser 3435D
Print Speed	Simplex: Up to 35 ppm (Letter), 33 ppm (A4)	
	Duplex: Up to 17.5 ipm (Letter), 17 ipm (A4)	
Print Resolution	Up to 1200 x 1200 dpi effective output	
First-Page-Out-Time	As fast as 8.5 seconds	
Warm-up Time	Less than 15 seconds	
Memory (std/max)	64 MB Flash ROM (includes 4 MB for additional fonts and macros) / 320 MB	
Processor	400 MHz	
Printer Language	PCL6, PostScript® 3™, IBM ProPrinter, EPSON	
Connectivity	Parallel, USB 2.0, Ethernet 10/100Base-TX	Parallel, USB 2.0
Operating System	Windows® 2000/ XP (32/64 bit)/ Vista® (32/64 bit)/Server® 2003 (32/64 bit), Linux® (Ubuntu, Red Hat® 8-9, Fedora Cores 1-4, Mandrake 9.2-10.1, SuSE® 8.2 - 9.2), Mac OS X 10.3-10.5	
Input Paper Size	Tray 1 and Tray 2 (optional): Plain Paper -A4, A5, Letter, Legal, Executive, Folio, ISO B5, JIS B5 Multipurpose Tray: Plain Paper - A4, A5, Letter, Legal, Executive, Folio, ISO B5, JIS B5, 3" x 5"; Envelopes - Monarch, No.9, No. 10, DL, C5, C6; Cardstock; Custom size - 76 x 127 mm - 215.9 x 356 mm Duplex: Plain Paper -A4, Letter, Legal, Folio, Officio	
Input Paper Weight	Tray 1 and Tray 2 (optional): 60 - 90gsm Multipurpose Tray: Plain Paper 60 - 90gsm; Others 60 - 163gsm Duplex: 75 - 90gsm	
Media Input Capacity	Standard: Multipurpose: Tray 50 sheets, Tray: 1 250 sheets Optional: Tray 2: 250 sheets	
Media Output Capacity	150 sheets face down	
Dimensions (W x D x H)	400 x 435 x 314 mm	
Weight	12.7 kg	
Power Supply	220 – 240 VAC, 50/60 Hz or 110 – 127 VAC, 50/60 Hz	
Power Consumption	Average: 400W; Power save mode: Less than 11W	
Operating Environment	Temperature: 10 °C - 32 °C Humidity: 20 - 80 % RH	
Noise Levels	Standby mode: Less than 25dBA; Printing mode: Less than 54dBA	
Device Management	Phaser Installer, CentreWare® IS Embedded Web Server, CentreWare Web, Global Print Driver	—
Warranty	Please check with your Fuji Xerox Printers reseller for more information.	

Consumables

Print Cartridge (up to 4,000 pages*)	CWAA0762
Print Cartridge (up to 10,000 pages*)	CWAA0763

* Average standard pages. Declared yield in accordance with ISO IEC 19752. Yield may vary depending on image, area, coverage and print mode. Printer is shipped with one starter print cartridge with an average yield of 4,000 pages.

Accessories (optional)

250-sheet Tray	EL300651
32 MB Memory	EL300652
64 MB Memory	EL300653
128 MB Memory	EL300654
256 MB Memory	EL300655

<Reproduction Prohibitions> Please note that reproduction of the following is prohibited by law:
Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates. Unused postage stamps and post cards. Certificate stamps stipulated by law. The reproduction of works for copyright purposes (literary works, musical works, paintings, engravings, maps, cinematographic works, photographic works, etc.) is prohibited except when they are reproduced personally, at home or within limited range according to the above. This product is equipped with an anti-counterfeit feature. This feature is not intended to prevent illegal reproduction. Be extremely careful about the management of equipment used.
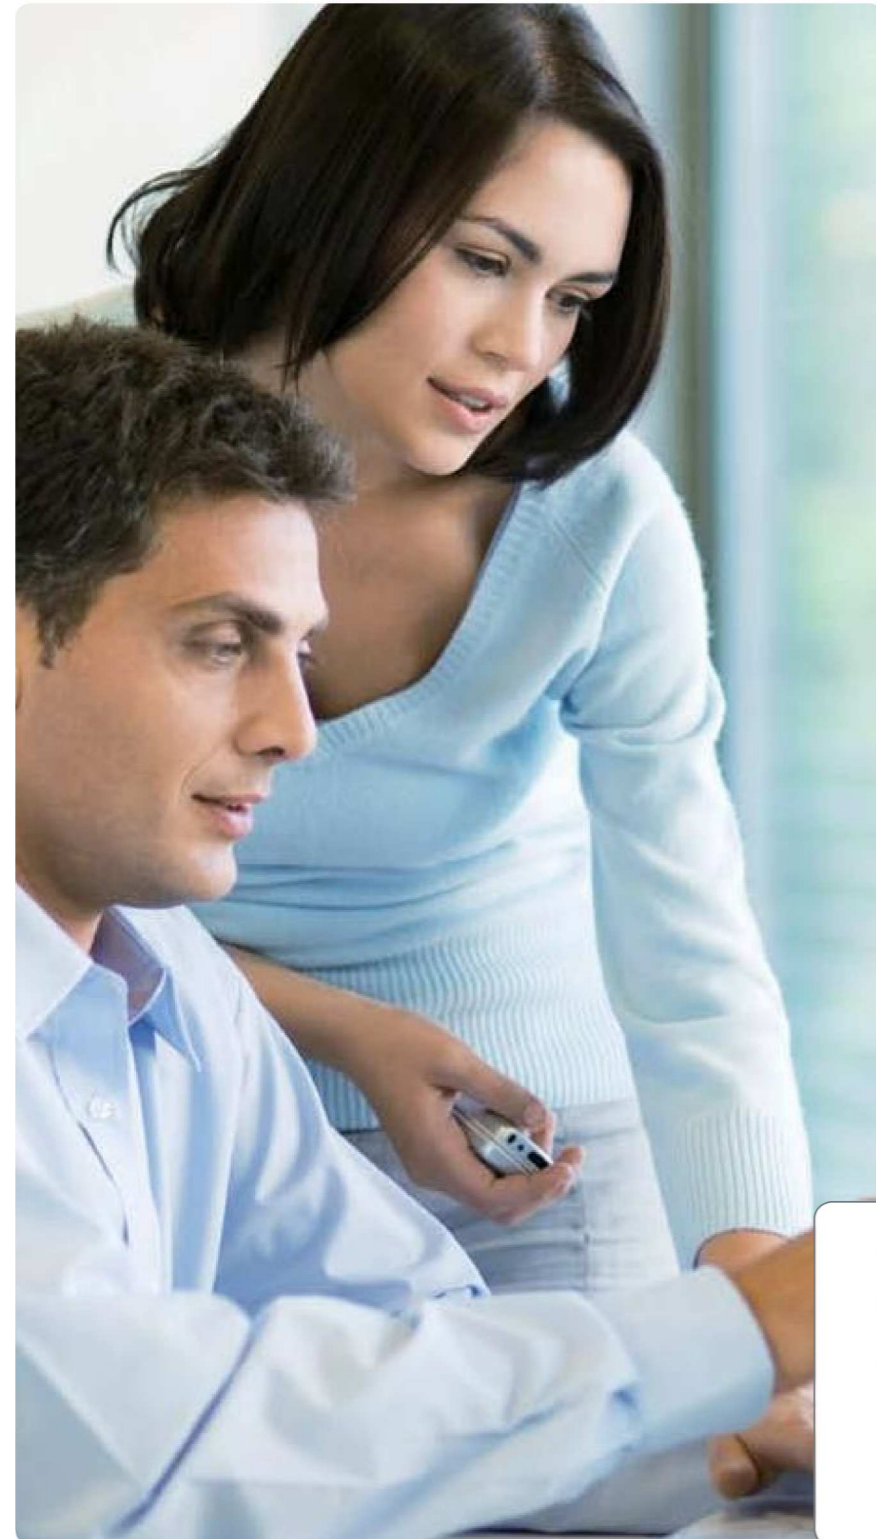
⚠ **For Your Safe Use**
Before using the product, read the Instruction Manual carefully for proper use.
Use the product with an appropriate adequate power source and voltage displayed. Be sure to establish a ground.
In the case of a failure or short circuit, an electric shock may result.

For more information or detailed product specifications,
call or visit us at:

FUJI XEROX

Fuji Xerox Asia Pacific Pte. Ltd. (993478-A)
(Fuji Xerox Printers)
Wisma Fuji Xerox,
1st Floor, No. 10, Jalan Bersatu 13/4,
46200 Petaling Jaya,
Selangor, Malaysia.
Tel: 03-7882 2888 Fax: 03-7882 2767

East Malaysia Office:
199A-201, Lot 3049 & 3050,
Eastmoore Centre,
2 1/2 Mile, Jalan Rock,
93200 Kuching,
Sarawak, Malaysia.
Tel: 082-428 650 Fax: 082-418 733

Service Hotline : 1800 88 1063
www.fujixeroxprinters.com.my

*XEROX, and the sphere of connectivity design are trademarks or registered trademarks of Xerox Corporation.

Phaser
3435DN
3435D

FUJI XEROX

Phaser 3435DN/3435D
Black & White Laser Printer
High-end features,
priced right for your business

Serious performance when quality and productivity count.

Superb output, low cost and reliable. The versatile Phaser 3435 black and white laser printer offers big-business features such as built-in networking*, automatic two-sided printing and expansion options. For busy offices and workgroups, the choice is clear.

* Phaser 3435DN only

Affordable, powerful business printer

The Phaser 3435 keeps your office or workgroup functioning at peak performance. Available in network and non-network configurations, this efficient printer delivers impressive, business class documents.

- **33 pages-per-minute** speeds printing of long, A4-size documents.
- **1200 x 1200 dpi output** produces sharp text and graphics.
- **8.5-second first-print-out-time** lessens waiting between print jobs.
- **Automatic two-sided printing** generates professional looking reports and saves paper.
- **400 MHz processor and standard 64 MB memory** handle complex documents without delay.
- **80,000-page maximum monthly duty cycle** meets the requirements for unusually high print demands.

Print
A4
33 ppm
W x D x H:
400 x 435 x 314 mm

More features for peak productivity

1 **50-sheet multipurpose tray** accepts envelopes, labels and other thick media as well as custom sizes from 76 x127 mm to 215.9 x 356 mm.

2 **250-sheet paper cassette** adjusts to a variety of sizes, including A4, Letter, Legal, A5 and B5.

3 **Optional 250-sheet paper cassette** installs easily and increases total capacity to 550 sheets.

4 **Intuitive, two-line LCD control panel** for easy access to the printer menu.

Automatic two-sided printing at 17 impressions-per-minute is ideal for printing reports and saves paper.

64 MB RAM quickly handles complex documents with graphics.

10/100Base-TX interface* for workgroup printing.

Centreware Internet Services (IS)* shows printer status information and allows configuration of settings via a web browser.

* Phaser 3435DN only

Quality output

Featuring 1200 dpi print resolution, the Phaser 3435 reproduces small text, fine lines and detailed graphics beautifully. Support for Postscript 3 smoothes gradations in graphics such as illustrations and photos.

Built for speed

Fast 33 ppm printing increases office efficiency, especially when printing multi-page documents. Moreover, an 8.5-second first-page-out-time and 15-second warm-up time further enhance speed and productivity.

Workgroup friendly*

Add the Phaser 3435 to your workgroup for outstanding productivity. Built-in 10/100Base-TX networking and multi-platform support — including Windows, Mac and Linux — make it perfect for nearly any office.

* Phaser 3435DN only